



Hunan Kamuja Machinery & Equipment Co.,Ltd









FEATURES

- ① Three arms design'*R" folding, The machine is fully driven by hydraulic, and can slew flexibly with wide working range
- 2) Two modes of operation: radio remote control and cable remote control, easy to operate.
- ③ The total weight is light, customer can lifting it easily on the job site.
- ④ The bottom frame is inclined outrigger structure, the working state is table and fixed.


STRUCTURE AND SCOPE OF WORK


HG17B-3R-II1

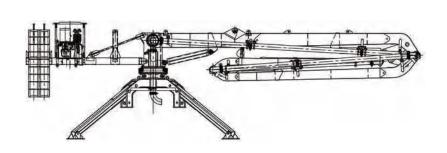



HG21B-3R-II1

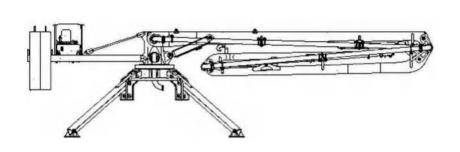








SPECIFICATIONS

ITEMS			UNITS	HG17B-3R-II	HG21B-3R
Performance	Max Radius of Placing Boom		m	17	21
	Free standing Height		m	2.7	3
	Slewing Range		/	360°	360°
	Circumstance Temperature		°C	-20-55	-20-55
	Power(subject to Customer)		/	380V/50HZ	380V/50HZ
	Delivery Pipeline Diameter		mmxmm	Diameter 133x4.5	Diameter 133x4.5
	Delivery Hose Diameter		"xmm	5" x 3000	5"x3000
Boom	1 st Section	Length	m	7.1	8.4
		Articulation	/	0~86°	0~90
	2nd Section	Length	m	5.5	6.9
		Articulation	/	0~180°	0~180.
	3rd Section	Length	m	4.5	5.7
		Articulation	/	0°~180°	0. ~180.
Type of Hydraulic Oil	Circumstance Temperature 5°C-55°C		°C	Hm46 Anti-wear hydraulic oil	
	Circumstance Temperature -20°C-5°C		°C	Hm32 Anti-wear hydraulic oil	
Motor	Power		kW	5.5	7.5
Hydraulic Pressure			MPa	25	28
Mode of Slewing			/	Turbo Worm Drive	Gear Slewing
Application scenario			/	Mobile	
Total Weight			kg	6500	9150
Max Lifting Unit			kg	1520	5850

^{*}The voltage frequency can be customized according to customer's requirement

Configuration parameters are subject to change without notice

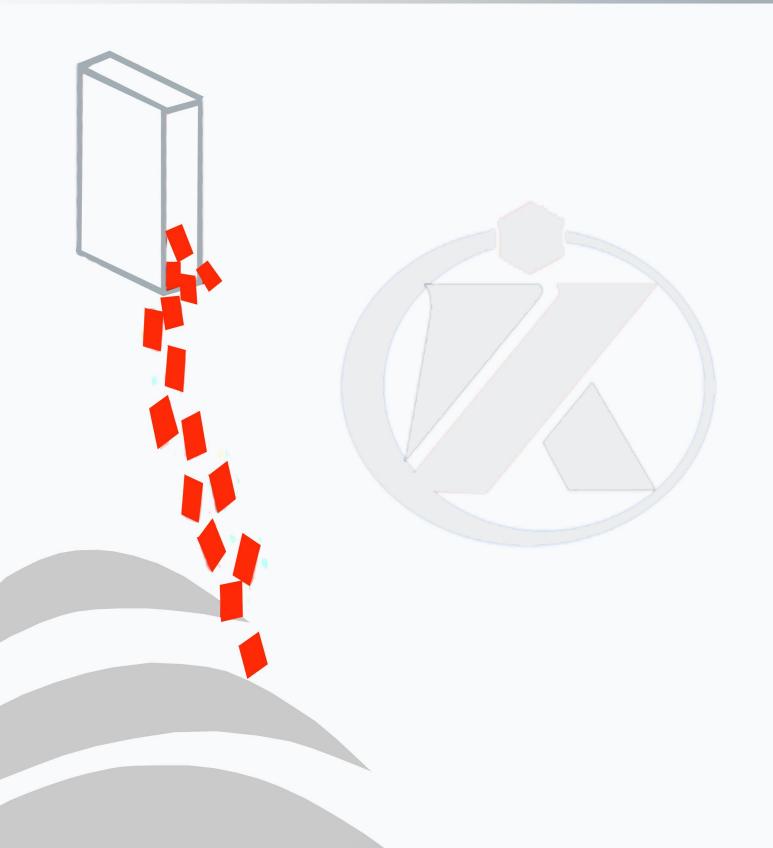

Hunan Kamuja Machinery & Equipment Co.,Ltd

Address: Qingzhu Hu Road N.18, Chang Tong Logistic Center Floor 4 Room 818, Jinxia Economic Development Zone, Changsha City, Hunan Province, P.R of China.

333 SE 2nd Avenue Suit 2000 Miami FL 33131. USA

Tel: +86 731 8867 7248 e-mail: info@kamuja.cn

Web site: www.kamuja.cn

